


ONDULINE SYSTEM ACCESSORIES



Safe Top Nails

The safe top bonded washer is resistant to UV radiation and with its weatherproof seal provides a superior resistance to wind uplift. Available in black, red, green and brown. The washer can also be used with roofing screws when required to fix to thin decking materials.

Material Specification:

Length: 75mm (overall) **Diameter:** 3.35mm
Packing: Packs of 100.




Plastic Headed Nails

Specially designed UV resistant plastic headed nails with zinc plated corrosion resistant shanks. Available in black, red, green and brown.

Material Specification:

Length: 65mm **Diameter:** 3.1mm
Packing: Packs of 400.

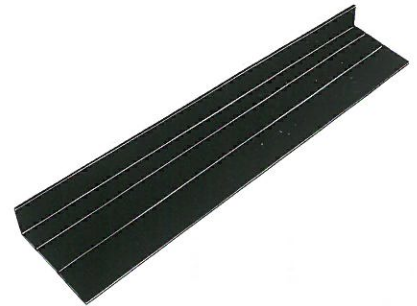


Multi-Purpose Eaves Tray

Manufactured in a UPVC sheet with pre-formed drip edge into the gutter. It is used for Onduline, Ondutile and Oversheeting roofing systems.

Material Specification:

Length: 1.500m **Coverage:** 1.300m
Lap: 200mm **Width:** 254mm

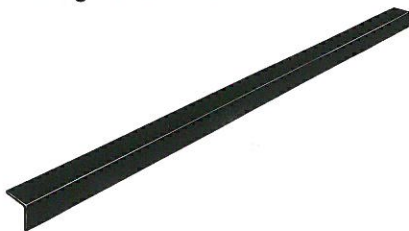


Batten Cloaking Piece

Designed for the Onduline system and used in conjunction with the Eaves Ventilator Strip, it protects the eaves batten from possible water ingress whilst also providing an aesthetically pleasing finish to the eaves detail.

Material Specification:

Length: 1.22m (1.12m cover width)
Width: 55mm x 55mm for 25mm battens

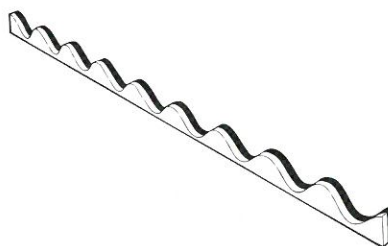


Corrugated Fillers

Designed to match the Onduline profile, these polyethylene units seal the corrugations at eaves and ridge, preventing the ingress of water, dust and draughts.

Material Specification:

Length: 855mm (cover width of sheet)
Onduline Profile 95 x 38mm
Packing: 100 per box

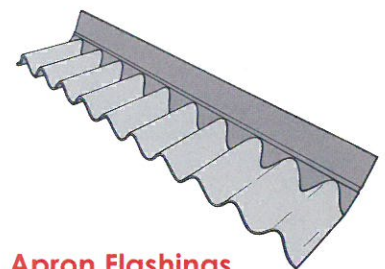

Apron Flashings

The apron flashings are designed to seal the gap between Onduline sheets and vertical wall abutments. Suitable for any pitch of roof.

Note: Also available in Onduline Mini 18 profile.

Material Specification:

Length: 930mm nominal length (835 cover width) Onduline Profile



Multi-Purpose Ventilator Strip

The Ventilator Strips are used to allow ventilation into the roof space whilst preventing the infiltration of birds and large insects into the eaves. They are secured by nailing with galvanised round headed nails.

Material Specification:

Length: 1000mm




Ridges Units

Manufactured from the same material and to the same high specification as Onduline sheets. Flexible double wings accommodate a wide range of roof angles. Available in the four Onduline colours - black, red, green and brown.

Material Specification:

Length: 1000mm Cover length: 780mm / 860mm Width (flat): 485mm

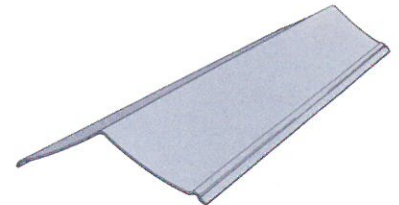


Verge Units

Manufactured from the same material and to the same high specification as Onduline sheets. Flexible double wings accommodate a wide range of roof angles. Available in the four Onduline colours - black, red, green and brown.

Material Specification:

Length: 1100mm - Cover length: 975mm
Width: (flat) : 410mm

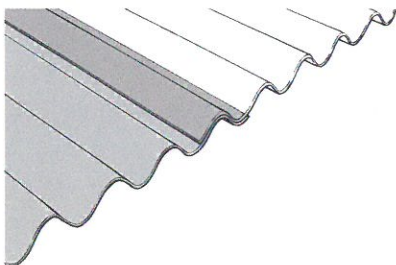


PVC Onduline Profile Sheets

Available in two forms - "glass clear" transparent to provide optimum clarity and light transmission and translucent for use where diffused lighting is required. Manufactured to the same size and profile as Onduline corrugated sheets, they provide a simple, economical way of gaining light through the roof.

Material Specification:

Length: 2000mm **Width:** 950mm




Roof Light Window

The Onduline skylight/roof window provides light and air to the roof and also serves as an exit to roof areas. Modern design prevents infiltration of snow and rain. Quick and easy to install.

Material Specification:

Base length: 890mm **Base Width:** 660mm
Height: 150mm **Thickness:** 3mm
Light Area: 360 x 420mm

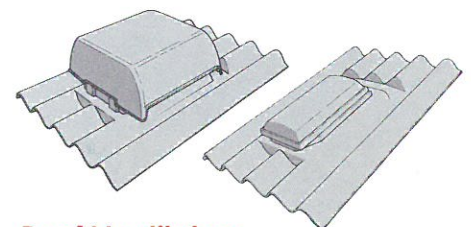

Roof Ventilators

A range of easy-to-fix roof ventilators designed specifically for use with Onduline sheets to provide an aesthetically pleasing appearance. They have low air resistance while preventing access by driving rain and snow.

Material Specification:

Free Air Space (WG33): 33,000mm²
Free Air Space (G3): 10,000mm²