

Plain tiles, fixed in accordance with
roof tile manufacturer's guidelines *

38 x 25 tile battens

Onduline sheeting

50 x 25 Onduline support batten


Onduline eaves tray

Onduline batten cloak and ventilator comb

50 x 38 counterbattens

Vapour permeable underlay

Rigid insulation board
(consult with insulation manufacturer
for vapour control layer)

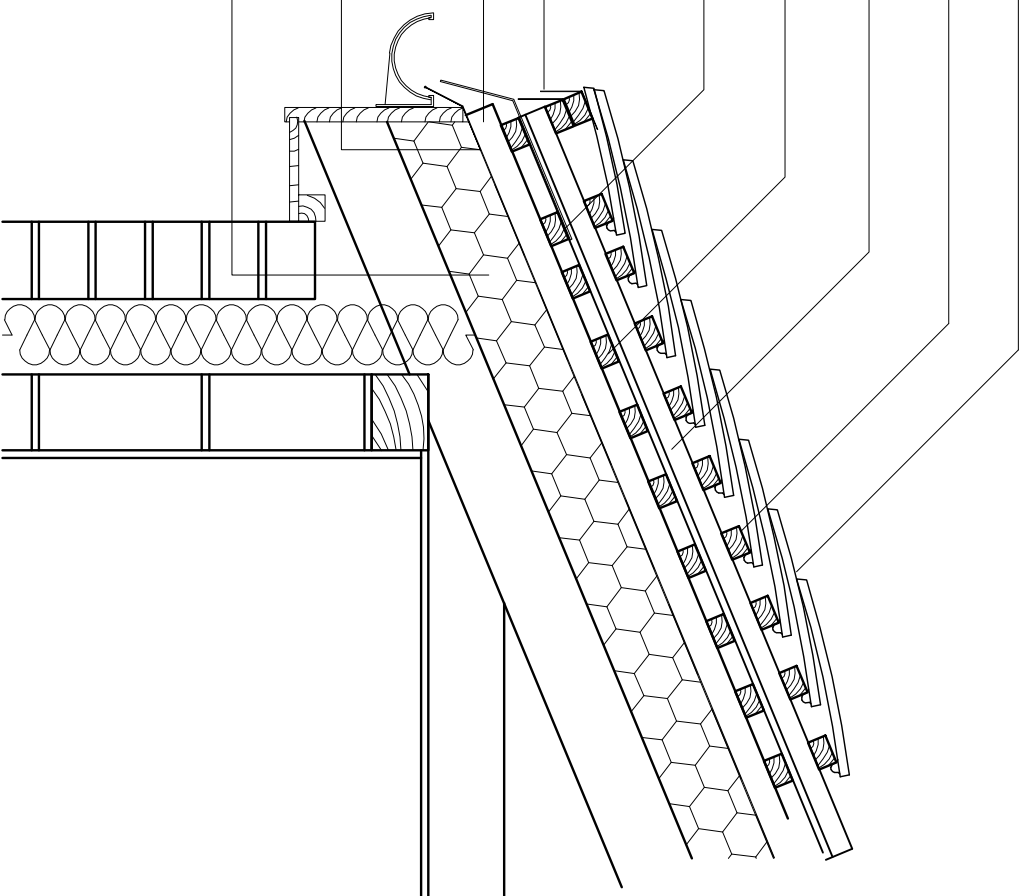

* Consult with roof tile manufacturer in respect
of low pitch and increased wind uplift

Warm Deck Roof with Plain Tile (22.5 degrees)